


GTI MAX

THE BEST HEAVY TRAFFIC FLOORING SOLUTION

gerflor.com



ESSE SOLUTION SAGL

FORNITURE AZIENDALI

Via Rompada, 37 - CASLANO

+41 076 758 5368 +41 079 709 8354


www.essesolution.ch info@essesolution.ch

Gerflor®


theflooringgroup

ESSE SOLUTION SAGL


REDISCOVER THE GTI MAX RANGE FOR AN EASY AND LONGLASTING RENOVATION




0266 - Peter R



0252 - Titanium R




0253 - Aluminium R




0255 - Saphir R



0253 - Aluminium




0249 - Carbon R



0247 - Magma R



0267 - Levante R




0264 - Ponente R




0265 - Maestrale R

R Rice emboss B Concrete emboss

ESSE SOLUTION SAGL



1249 - Tramontana B




0260 - Ora B




0262 - Libeccio B




0263 - Bora B




0259 - Grecale B



0261 - Scirocco B



0268 - Ermellino B

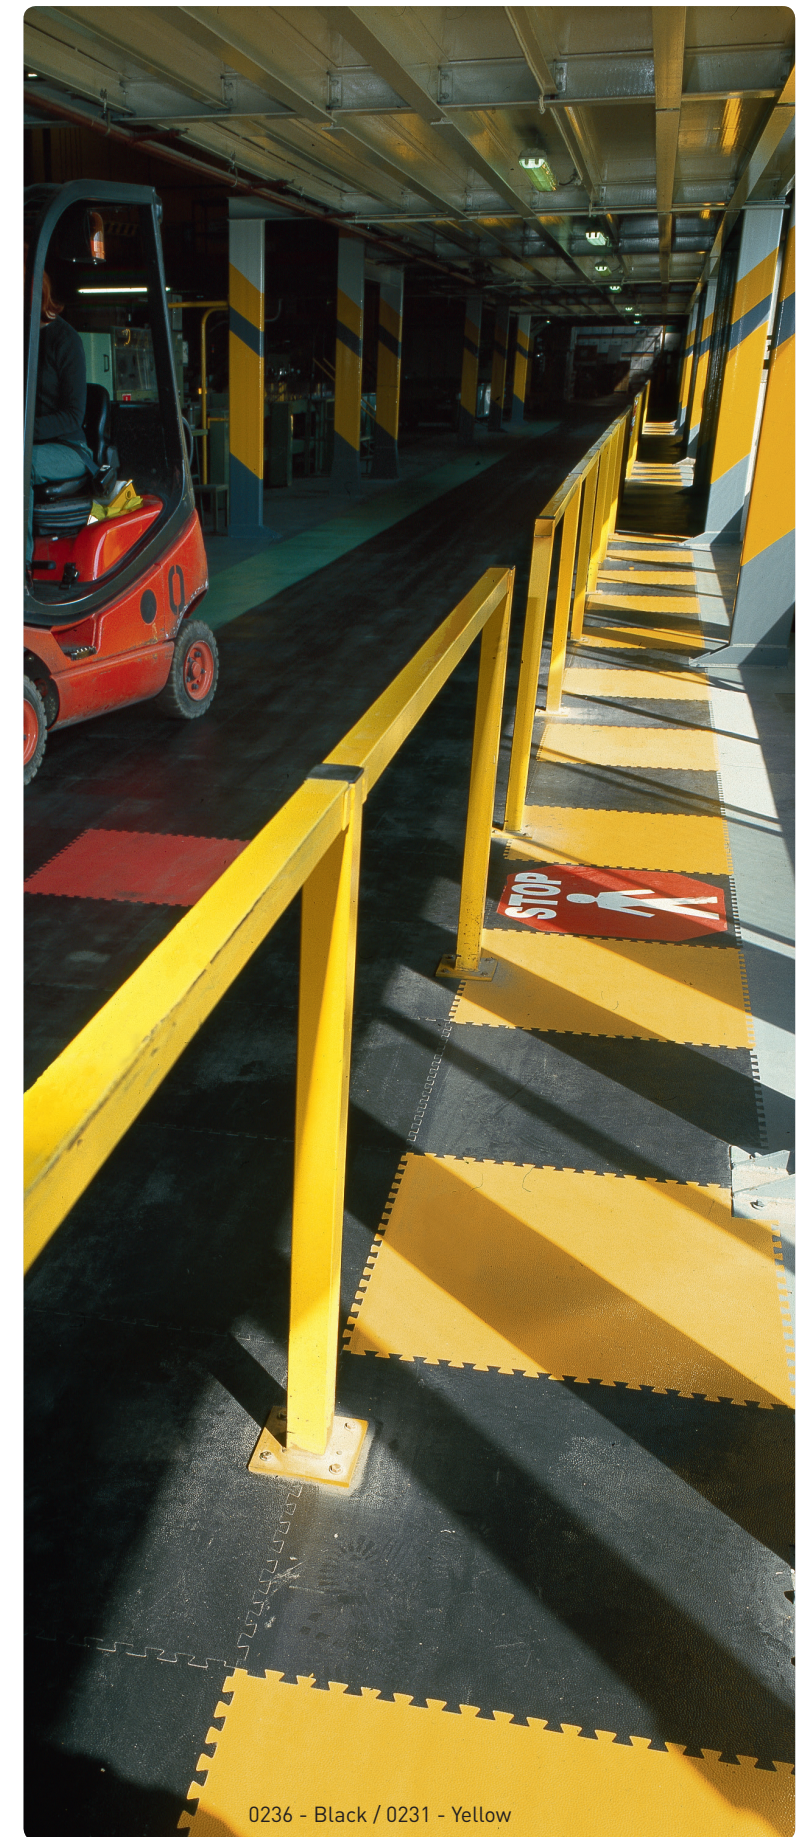


0236 - Black / 0231 - Yellow




0236 - Black R




0234 - Light Grey R



0235 - Dark Grey R



0232 - Red R




0230 - Blue R



0233 - Green R



0231 - Yellow⁽¹⁾



0244 - Yellow⁽²⁾ R

⁽¹⁾ available in 2021
⁽²⁾ available in 2020

ESSE SOLUTION SAGL

RICE EMBOSSING



SLIP RESISTANCE **R10 RATED**

10 YEARS OF EXPERIENCE

16 COLOURS

ESSE SOLUTION SAGL

CONCRETE EMBOSSING



SLIP RESISTANCE **R10 RATED**

HSE 36 COMPLIANT

7 COLOURS


ESSE SOLUTION SAGL

HEAVY TRAFFIC RESISTANCE!



- Dynamic Load: up to 6000 kg*
- Static load: up to 50 kg/cm²


INSTALLATION ON ANY TYPE OF SURFACE



TILES



CONCRETE



RESIN



WET SURFACES
- up to 7% humidity / 92% RH



ASBESTOS SURFACES



NO NEED TO STOP WORK




- Fast looselay installation allowing the area to remain open
- Clean installation - no adhesive or dust
- A 2 person team can install up to 200m² in 8 hours


* Refer to installation guidelines

GTI MAX

HARD-WEARING



- Tiles triple pressed at over **3000 T**



- **2mm** wear layer



- PUR+ surface treatment enabling **easy maintenance**


USER COMFORT & SAFETY



- **19 dB** less noise than tiling when users walk on it
- Underfoot comfort: **reduces fatigue**



- More slip-resistant than other types of surface (**R10 rated**)




- **4 x less hazardous** than tiling in the head impact assessment [Standard 1177: head impact - 66 cm vs. 10 cm]



DESIGNS & LAYOUT

- Easy to install: modular tile format
- 23 colours to create zoning & corners

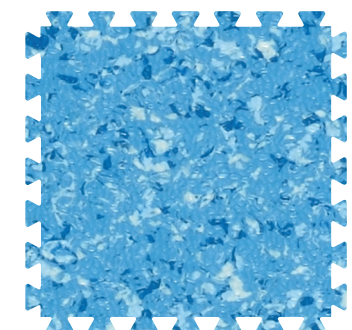

635 x 635 mm



TRIAL BY EXPERIENCE



THE HOTEL AND HOSPITALITY SECTOR



The installation of our new flooring has breathed fresh life into this area of high pedestrian traffic. It is light and easy to maintain - we love it!

Blaine, USA - 200 m² of GTI Max



HEALTHCARE - DRÔME HOSPITAL



We had to renew the floor coverings in the two main passageways of the hospital, without closing off access to areas that are submitted to heavy pedestrian and logistics traffic. Gerflor's GTI flooring was the natural and obvious choice.

Romans, France
300 m² of GTI Max



HEATHROW AIRPORT TERMINAL 3



The GTI Max tiling perfectly fulfilled all of our selection criteria:

- To keep pedestrian and machinery routes open throughout its installation
- To allow existing furniture to remain in place
- To minimise any weight addition to the airport structure

Heathrow, England
4000 m² of GTI Max




FULL SOLUTION

100% LOOSELAY FLOORS AND FINISHES


FINISHING SOLUTIONS

CORNER & ACCESS

- Corners



- Access (access ramp)

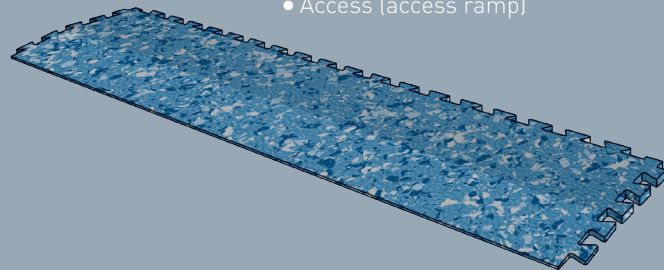

THE +


- All GTI MAX colours available

ALUMINIUM RAMP


- Withstands intensive footfall
- Unique 100% loose-lay system

THE +

- Quick to install and can be removed without causing any damage
- Elegant and durable aluminium




0609 - Ramp



0629 - Corner

ESPLANADE 9000 KIT

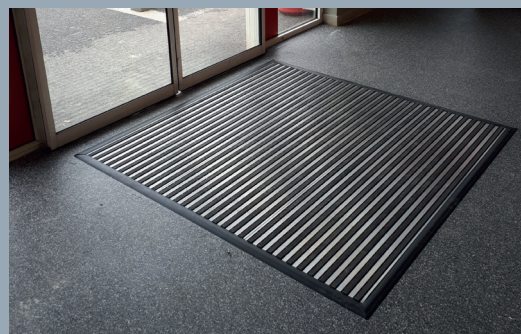

1700 - Esplanade 9000

- Very resistant materials and closed construction for a long lasting performance and high mechanical solicitation
- Semi loose-lay installation inside LVT / GTI
- Full kit ready to lay
- Adapted to GTI thickness

ESSE SOLUTION SAGL

TAILOR-MADE SOLUTION

MY LOGO



- Create your logo using our water jet cutting system.
- The logo is produced using the finished product.

THE +

- Withstands intensive footfall without fading.


100% WATERPROOF SOLUTION

GTI MAX CLEANTECH TILE

- Square with straight edges
- Heat seamable

THE +

- Enables a waterproof surface

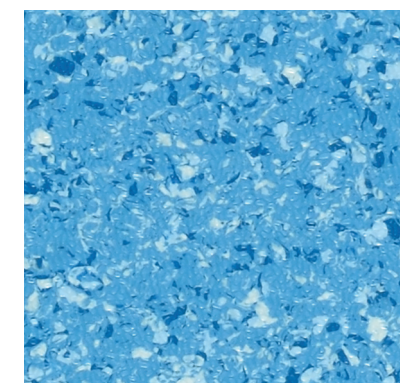

600 x 600 mm



LESS ADHESIVE MORE RECYCLING



COMPOSITION

- 100% REACH compliant
- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



RECYCLED CONTENT

- 80% recycled content
- 100% REACH compliant recycled content



LIFE CYCLE ANALYSIS

- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an ISO 14001 and ISO 50001 certified site
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)



RECYCLING

- 100% recyclable product



INSTALLATION

- Adhesive free installation



INDOOR AIR QUALITY


- TVOC emissions 10 times better than norm requirements (TVOC < 100 µg/m³ after 28 days)
- Floorscore® certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission

ESSE SOLUTION SAGL



TECHNICAL DATA

GTI MAX

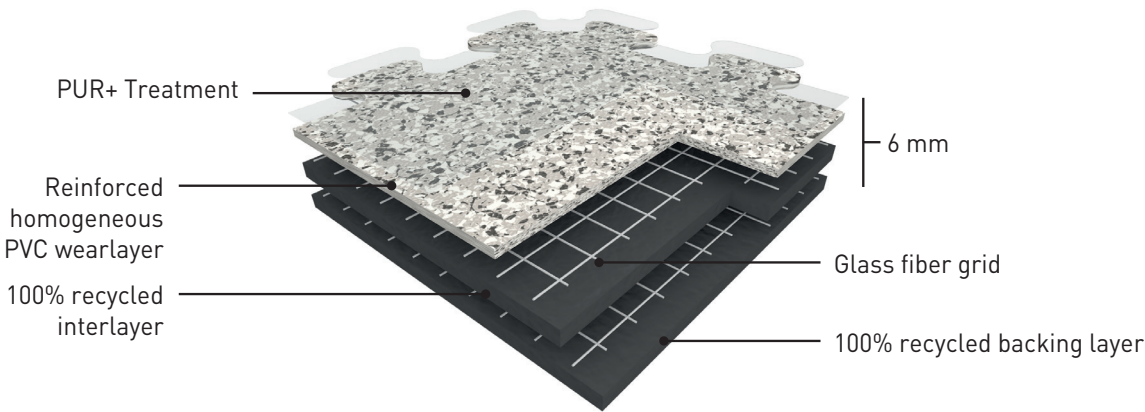

GTI MAX CONNECT is a multi-layered interlocking looselay vinyl tile with polyurethane treatment (PUR+), 6 mm thick with a dovetail joint, abrasion group T. It is manufactured by GERFLOR using a continuous and exclusive high pressure process.

GTI MAX CLEANTECH is a multi-layered looselay vinyl tile with polyurethane treatment (PUR+), 6 mm thick with welded joints, abrasion group T. It is manufactured by GERFLOR using a continuous high pressure process.

The **GTI MAX** wear layer is reinforced by specific oblong fillers that offers an outstanding resistance to traffic.

GTI MAX is reinforced with 2 glass fiber grids on either side of an intermediate pressed homogeneous layer. GTI's backing is a 4 mm thick black pressed homogeneous sheet, its surface is a colored and reinforced homogeneous sheet 2 mm thick.

It is made of 100% controlled recycled materials.

It is 100% recyclable and made with up to 80% recycled content.

GTI MAX

- Resistant to heavy traffic
- Fast renovation: can be installed over existing floorcovering
- No subfloor preparation, no adhesive and no production stoppage (no loss of revenue)
- Polyurethane surface treatment PUR+ for ease of maintenance
- 6 Standard logos: Mix and match colours to create corners and walkways

GTI MAX

CONCRETE EMOSS | RICE EMOSS

DESCRIPTION

Total thickness	EN ISO 24346	mm	6
Wearlayer thickness	EN ISO 24340	mm	2
Weight	EN ISO 23997	g/sq.m	9365
Size CONNECT			635 x 635
Size CLEANTECH ⁽¹⁾ (without dovetail)	EN ISO 24342	mm	600 x 600

CLASSIFICATION

Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	Class	34-43
Fire rating	EN 13 501-1	Class	B _{fl} -s1
Static electrical propensity	EN 1815	kV	≤ 2
Slip resistance wet: ramp test with oil	DIN 51 130	Class	R10
Pendulum test	BS 7976	-	HSE 36 compliant ⁽²⁾ -

PERFORMANCES

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	-	T
Type Binder content	ISO 10582	type	I
Dimensional stability	EN ISO 23999	%	≤ 0.15
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type W)	ISO 4918	-	OK
Shore Hardness	EN ISO 868	Hd	≥ 55
Shifting resistance	CSTB 3562	N/mm ²	≥ 30
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25
Colour fastness	EN 20 105 - B02	Degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance	EN ISO 26987	-	OK

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000-6	µg / m ³	<100
Certification	-	-	Floorscore®

CE MARKING

CE	EN 14041	
----	----------	--

(1) Available upon request

(2) HSE 36 compliant only for 7 references: Ermellino - Ora - Bora - Libeccio - Grecale - Scirocco - Tramontana

Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Entrance mats



Skirtings
& Profiles

ESSE SOLUTION SAGL

FORNITURE AZIENDALI

Via Rompada, 37 - CASLANO

+41 076 758 5368 +41 079 709 8354

www.essesolution.ch info@essesolution.ch



Z0044881

Gerflor

Be connected!



www.gerflor.com

#Gerflor

GTI MAX: LESS ADHESIVE, MORE RECYCLING



COMPOSITION
100% REACH



INSTALLATION
Adhesive free



**INDOOR
AIR QUALITY**
10 times lower
than norms requirements
(TVOC <100 µg/m³ after 28 days)



**RECYCLED
CONTENT**
80%



RECYCLABILITY
100%
recyclable product



LCA
Eco-designed
according to a
product specific Life
Cycle Analysis

ESSE SOLUTION SAGL

Gerflor
theflooringgroup